COLORTECH - BT


Laboratory Service Fittings by WaterSaver Faucet Co.

BTEW1025

DRENCH HOSE UNIT, WALL MOUNTED, REINFORCED PLASTIC HOSE

BTEW1025BSH

SAME AS BTEW1025 EXCEPT WITH BRAIDED STAINLESS STEEL HOSE

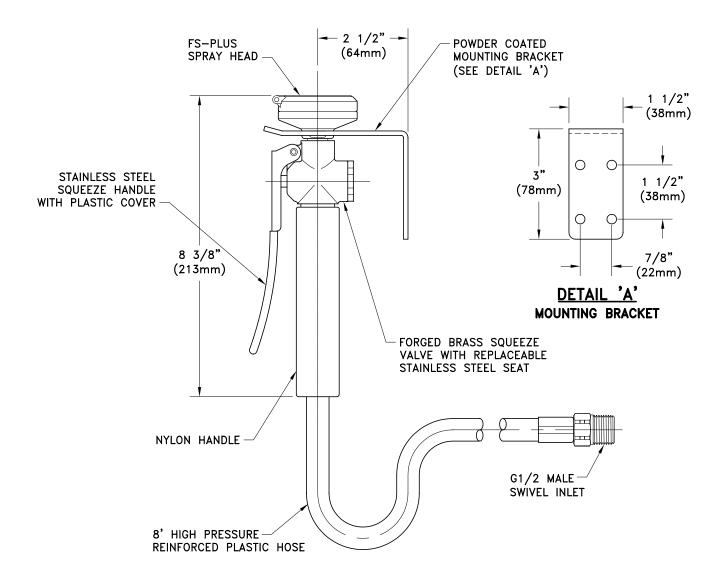

NOTES:

1. FS-PLUS SPRAY HEAD HAS A "FLIP-TOP" DUST COVER, INTERNAL FLOW CONTROL AND FILTER TO REMOVE IMPURITIES FROM THE WATER FLOW.

701 West Erie Street

wsflab.com

Chicago, Illinois 60610 Fax 312 666 8597

Phone 312 666 5500

- 2. HOSE SHOULD NOT BE USED IN APPLICATIONS WHERE WATER PRESSURE EXCEEDS 90 PSI. HOSE SHOULD BE INSPECTED PERIODICALLY FOR DETERIORATION.
- 3. ALL EXPOSED BRASS COMPONENTS ARE FURNISHED WITH COLORTECH POWDER COATING.

NITS (EXCEPT THOSE WITH SELF-CLOSIN	NG VALVES) COMPLY WITH THE REQU	UIREMENTS OF ANSI Z358.1. TEST ALL EMERGENCY EQUIPMENT AT LEAST W	/EEKLY
		MEASUREMENTS MAY VARY ±1/4" (6mn	m).
anning Normalism	Annavada	Pavisian Number: 111505-KJS	